

GANGBUSTERS

DIP SWITCH SETTINGS

DIP SWITCH NO.1 SETTINGS

1. COIN SWITCH NO.1 SETTINGS

SW	1	2	3	4	COIN	PLAY
○	OFF	OFF	OFF	OFF	1	1
	ON				1	2
	OFF	ON			1	3
	ON				1	4
	OFF	OFF	ON	OFF	1	5
	ON				1	6
	OFF	ON			1	7
	ON				2	1
	OFF	OFF	OFF	ON	2	2
	ON				2	3
	OFF	ON			3	4
	ON				3	5
	OFF	OFF	ON	ON	3	6
	ON				4	1
	OFF	ON			4	2
	ON				4	3
					FREEPLAY	

FREEPLAY: You can play games without coins.

2. COIN SWITCH NO.2 SETTINGS

SW	5	6	7	8	COIN	PLAY
○	OFF	OFF	OFF	OFF	1	1
	ON				1	2
	OFF	ON			1	3
	ON				1	4
	OFF	OFF	ON	OFF	1	5
	ON				1	6
	OFF	ON			1	7
	ON				2	1
	OFF	OFF	OFF	ON	2	2
	ON				2	3
	OFF	ON			3	4
	ON				3	5
	OFF	OFF	ON	ON	3	6
	ON				4	1
	OFF	ON			4	2
	ON				4	3
					VOID	

DIP SWITCH NO.2 SETTINGS

1. THE NUMBER OF PLAYER'S LIFE

SW	1	2	NUMBER
○	OFF	OFF	2
	ON		3
	OFF	ON	5
	ON		7

2. THE NUMBER OF BULLET (PER RED ENEMY OR BULLET BELT CAPTURED)

SW	3	NUMBER
○	OFF	50
	ON	60

3. BONUS LIFE

SW	4	5	BONUS LIFE
○	OFF	OFF	AT 50,000PTS, 200,000PTS, AND 400,000PTS
	ON		AT 70,000PTS, 250,000PTS, AND 500,000PTS
	OFF	ON	AT 50,000PTS ONLY
	ON		AT 70,000PTS ONLY

4. DIFFICULTY OF THE GAME

SW	6	7	DIFFICULTY
○	OFF	OFF	EASY
	ON		NORMAL
	OFF	ON	DIFFICULT
	ON		VERY DIFFICULT

5. SOUND IN ATTRACTIVE MOODE

SW	8	SOUND
○	OFF	OFF
	ON	ON

DIP SWITCH NO.3 SETTINGS

1. VIDEO SCREEN FLIP

SW	1	
○	OFF	NORMAL
	ON	UPSIDE DOWN


2. CHANGE OF MODE

SW	3	MODE
○	OFF	GAME MODE
	ON	TEST MODE

SW2 and SW4 are not used.

○ shows recommended settings.

Gang Busters

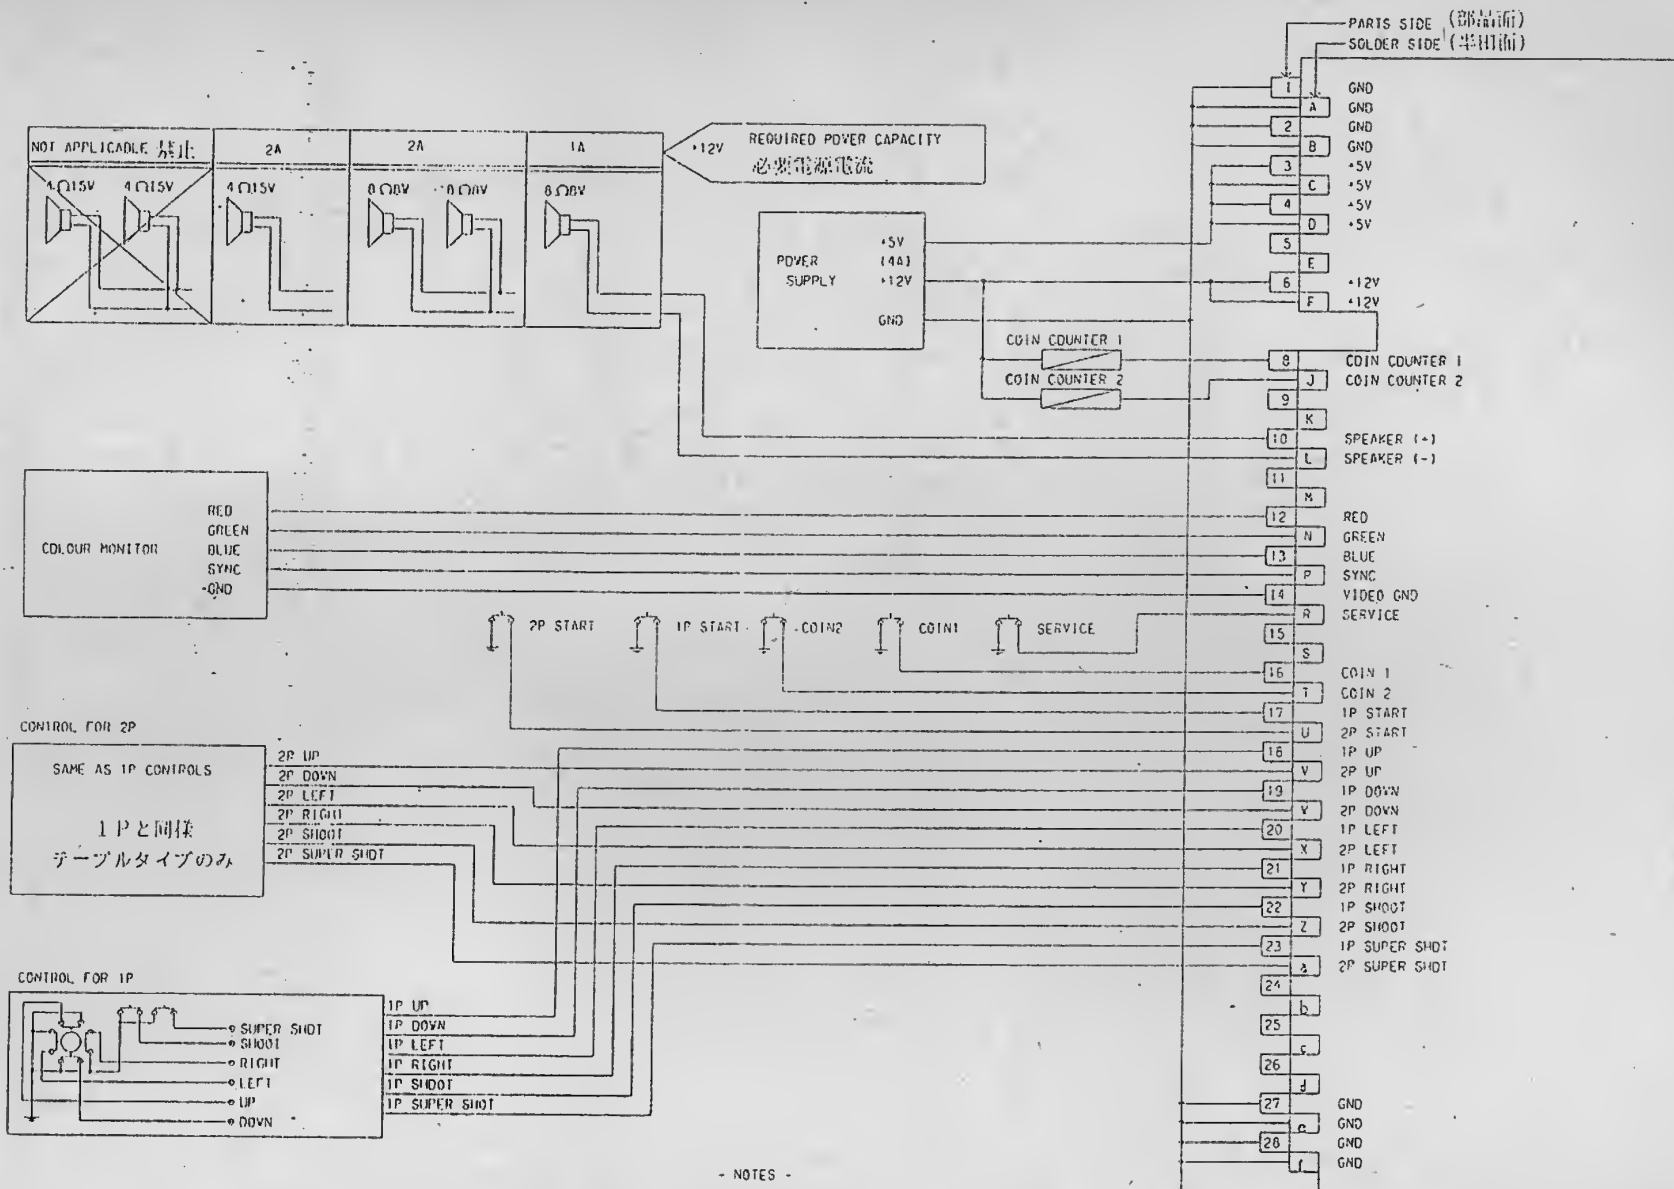

- NOTES -

- 1P IS NO.1 PLAYER
2P IS NO.2 PLAYER
- SURGE KILLER DIODES FOR COIN COUNTER INSTALLED ON THE P.C.B.
コインカウンター用保護ダイオードは
P.C.B.に取り付け済みです。

JAMMA 56PIN EDGE CONNECTOR
5/32 INCH PITCH

KONAMI		KONAMI INDUSTRY CO., LTD.		REG. TYPE	WIRING DIAGRAM
DATE	88.06.20	NAME	GX878 PWB351170A		
SCALE	TOLE- RANCE	CODE NO.	351268		